

DC ON/OFF Switch (24DC) Toggle Type



DC ON/OFF Switch (24DC) Toggle Type

Technical Information

Amperage: 3 Amps

Grounding: Self-Grounding

Voltage: 34 VAC/VDC

Flammability: UL94V-2

Operating Temp: -40C to 65C

Contacts: Silver-Alloy

Strap Material: Steel

Terminal Screws: Brass

Termination: Back or Side Wire

B/P Type Color: White


Toggle Type: Black or White

Function: Single Pole

Grade: Extra Heavy-Duty Industrial

INSTALLATION RECOMMENDATION:

Use both poles in parallel, by spitting the (+) wire into a Y connecting to the switch. Split each wire into one (1) of the two (2) poles (internal Contacts). Recombine (+) wires into a Y on the output of the Switch to the light fixture(s). The two (2) poles see half (1/2) the current entering the load. (See *Installation Recommendation Schematic.*)

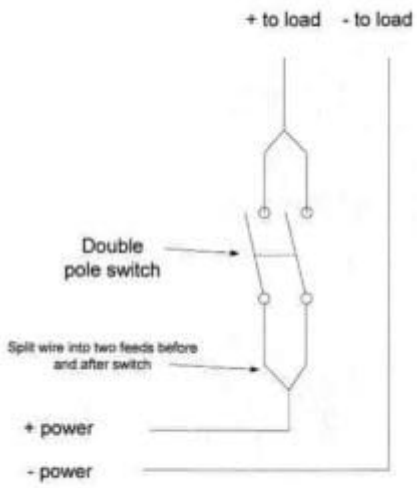

Marshall DC Lighting
329 W Lone Cactus Drive Suite 1 Phoenix, AZ 85027
www.marshalldc.com
info@dclightfixtures.com
602-777-0028